


Installation Instructions

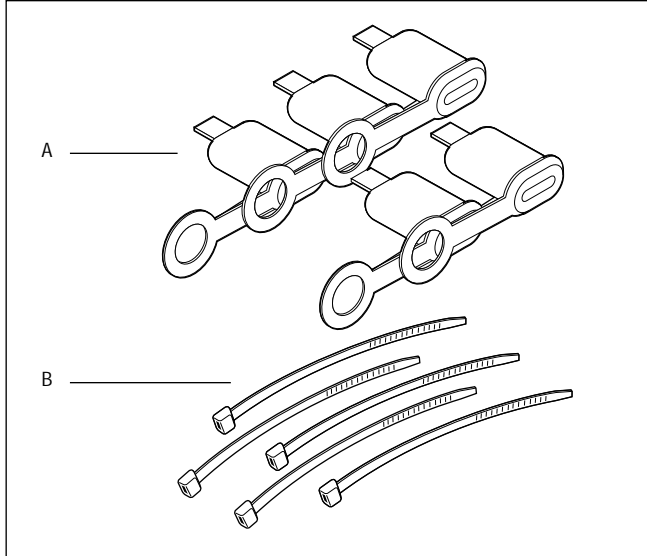

Kit Contents

Item	Qty	Description
A	5	Boots
B	5	Cable ties

Description

The E-100-LBTV2-BOOT-5/PACK kit contains five replacement boots for use with the E-100-LBTV2 end seals. Boots may be used several times on the same heating cable end. Do not reuse a boot on another heating cable. Also, boots should be replaced whenever they are damaged or the sealant appears dry or contaminated or is missing. These boots must be used with the entire E-100-LBTV2 end seal kit; they must not be used alone.

The boots may be installed at temperatures as low as -40°F (-40°C). For easier installation, store kit above freezing until installation.

For technical support call Raychem at (800) 545-6258.

Tools Required

- Wire cutters
- Adjustable pliers

WARNING:

This component is an electrical device that must be installed correctly to ensure proper operation and to prevent shock or fire. Read these important warnings and carefully follow all of the installation instructions.

- To minimize the danger of fire from sustained electrical arcing if the heating cable is damaged or improperly installed, and to comply with the requirements of Raychem, agency certifications, and the National Electrical Code, ground-fault equipment protection must be used on each heating cable branch circuit. Arcing may not be stopped by conventional circuit protection.
- Component approvals and performance are based on the use of Raychem-specified parts only. Do not substitute parts or use vinyl electrical tape.

- The black heating cable core is conductive and can short. It must be properly insulated and kept dry.
- Keep components and heating cable ends dry before and during installation.
- Damaged bus wires can overheat or short. Do not break braid or bus wire strands when scoring the jacket or core.
- Bus wires will short if they contact each other. Keep bus wires separated.
- Leave these installation instructions with the user for future reference.

CAUTION:

Health Hazard: Prolonged or repeated contact with the sealant in the end seal boot may cause skin irritation. Wash hands thoroughly.

Overheating or burning the sealant will produce fumes that may cause polymer fume fever.

Avoid contamination of cigarettes or tobacco.

Consult MSDS RAY5510 for further information.

CHEMTREC 24-hour emergency telephone:
(800) 424-9300.

Non-emergency health and safety information:
(650) 361-4907.

E-100-LBTV2-BOOT-5/PACK Installation Instructions

1

⚠ WARNING: Shock Hazard.
 Conductors will be exposed.
 Re-entry should be performed
 by a qualified electrician.
 Follow standard electrical
 lockout procedures before
 opening end seal.

- Turn off power.
- Clip cable tie and remove.

END SEAL
 ELECTRIC TRACED
 Raychem

2

- Remove cap.

END SEAL
 ELECTRIC TRACED
 Raychem

END SEAL
 ELECTRIC TRACED
 Raychem

3

⚠ CAUTION: Health Hazard.
 Wash hands after contact with
 sealant. Consult material
 safety data sheet RAY5510.

- Remove boot.

END SEAL
 ELECTRIC TRACED
 Raychem

4

- Place loop of new boot around the cable.
- Push boot onto the end of the cable until it bottoms out. Be careful not to squeeze sealant out of boot.

END SEAL

END SEAL

5

- Install cap; tighten until slots on cap and stand align.
- Install cable tie.

END SEAL
 ELECTRIC TRACED
 Raychem

END SEAL
 ELECTRIC TRACED
 Raychem

END SEAL
 ELECTRIC TRACED
 Raychem

Trim

Cable tie

Worldwide Headquarters
 Raychem Corporation
 300 Constitution Drive
 Menlo Park, California 94025-1164
 USA
 Tel (800) 545-6258
 Fax (800) 611-2323
 Fax-on-Demand (800) 329-4494
 ciinfo@raychem.com
 www.raychem.com

North America
 Raychem Canada Limited
 Toronto, Ontario
 Canada
 Tel (800) 545-6258
 Fax (650) 361-5579

South America
 Raychem S.A.I.C.
 Carlos Pellegrini 1163, Piso 7
 1009 Capital Federal, Buenos Aires
 Argentina
 Tel (54) 11/4394-5150
 Fax (54) 11/4326-9985