

Heat-tracing remote monitoring module for the DigiTrace NGC control system

Product overview

The DigiTrace remote monitoring module (RMM2) provides temperature monitoring capability for the NGC heat-tracing control and monitoring systems. The RMM2 accepts up to eight RTDs that measure pipe, vessel, or ambient temperatures in a heat-tracing system. Multiple RMM2s communicate with a single NGC controller to provide centralized monitoring of temperatures. A single, twisted pair RS-485 cable connects up to 16 RMM2s for a total monitoring capacity of 128 temperatures.

Control and monitoring

The RMM2 modules are used to aggregate RTD wires in one remote location and send the information back to the control system through a single twisted pair cable. This helps reduce installation costs since only one conduit run returns to the controller, rather than eight. The RMM2s are placed near desired measurement locations in nonhazardous or hazardous locations. Multiple temperature sensor inputs are networked over a single cable, significantly reducing installation cost.

Alarms


Each temperature sensor connected to a RMM2 may have individual low- and high-temperature alarms. Alarm limits are set

and alarm conditions are reported at the control panel. Additional alarms are triggered for failed temperature sensors and communication errors. Alarms may be reported remotely through an alarm relay in the control system or through an RS-485 connection to a host computer supporting the Modbus® protocol.

Configurations


The RMM2 clips to a DIN 35 rail and can be mounted in a choice of enclosures, as required for the area classification and environment. For aggressive environments and Division 2 hazardous locations, Tyco Thermal Controls offers a glass-reinforced polyester NEMA 4X enclosure.

RMM2 without enclosure

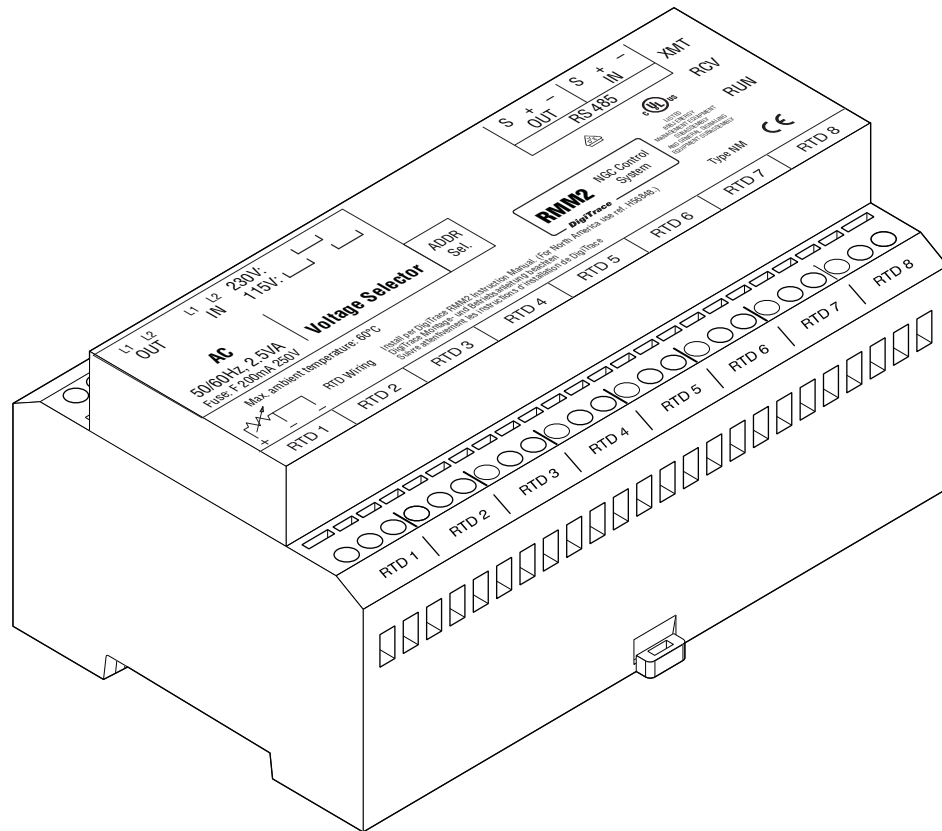

Dimensions

Figure 1

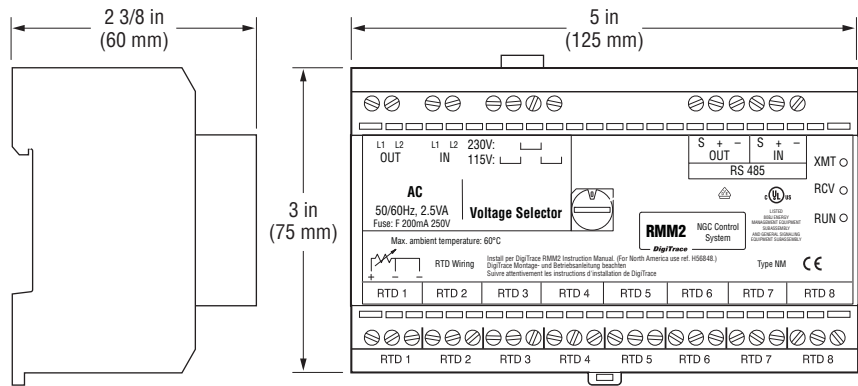

General

RMM2

Area of use (with appropriate enclosure)	Nonhazardous or hazardous locations
Approvals	Nonhazardous locations



**80BJ ENERGY MANAGEMENT
EQUIPMENT SUBASSEMBLY
AND GENERAL SIGNALING
EQUIPMENT SUBASSEMBLY**

Type NM

Ambient operating temperature range	-40°F to 140°F (-40°C to 60°C)
Ambient storage temperature range	-40°F to 140°F (-40°C to 60°C)
Relative humidity	5% to 95%, noncondensing
Supply voltage (nominal)	115/230 Vac, ±10%, jumper selectable. (The default voltage is 230 Vac. A jumper is supplied to convert to 115 Vac.)
Internal power consumption	≤ 3 W

RMM2 with Division 2 Enclosure

RMM2-4X

Protection	NEMA 4X
Approvals	Hazardous locations



**9Z63 TEMPERATURE
INDICATING EQUIPMENT
FOR USE IN HAZARDOUS
LOCATIONS**

Class I, Division 2, Groups A, B, C, D
Class II, Division 2, Groups F, G

Material	Glass-reinforced polyester, silicone gasket, stainless steel hardware
Entries	Six 3/4-in (19 mm) NPT conduit entrance holes, four plugged
Mounting	Surface mounting dimensions are shown in Figure 2

Temperature Sensor Inputs


Type	100 Ω platinum RTD, 3-wire, $\alpha = .00385 \Omega/\Omega/^\circ\text{C}$
Quantity per RMM2	Up to 8 RTDs can be extended with a 3-conductor shielded cable of 20 Ω maximum per conductor

Communication to NGC Controller

Type	RS-485
Cable	One shielded twisted pair
Length	4000 ft (1200 m) maximum
Quantity	Up to 16 RMM2s may be connected to one NGC-30
Address	Switch-selectable on RMM2, 16 addresses, 0-9, A-F

Enclosure Dimensions

Figure 2

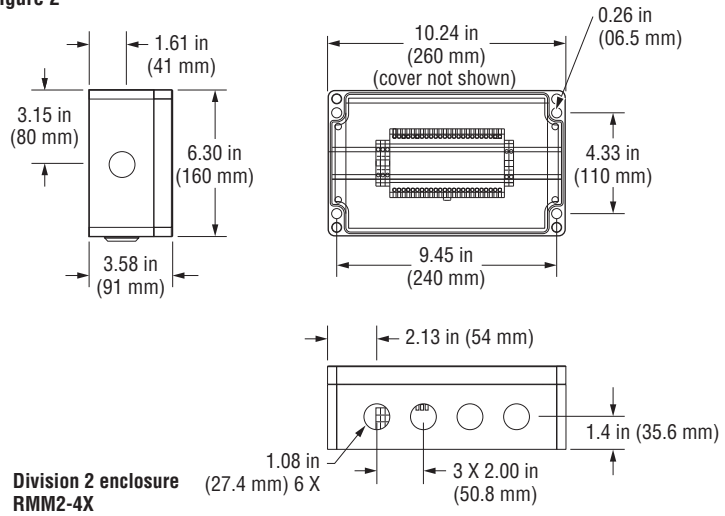

Connection Terminals

Power supply	24–12 AWG
RTD, communications	24–12 AWG

Ordering Details

	Catalog number	Part number	Weight
Remote monitoring module (RMM2)			
RMM2, eight RTD inputs, no enclosure	RMM2	051778-000	1.5 lb (0.7 kg)
RMM2 with NEMA 4X enclosure	RMM2-4X	523420-000	4 lb (1.8 kg)
Cables			
RTD extension cable, 1000-ft reel	MONI-RTD-WIRE	962661-000	20 lb (9.1 kg)
RS-485 cable, 1000-ft reel	MONI-RS485-WIRE	549097-000	17 lb (7.7 kg)

**Worldwide Headquarters
Tyco Thermal Controls**

7433 Harwin Drive
Houston, TX 77036
USA
Tel: 800-545-6258
Tel: 650-216-1526
Fax: 800-527-5703
Fax: 650-474-7711
info@tycothermal.com
www.tycothermal.com

**Canada
Tyco Thermal Controls**

250 West St.
Trenton, Ontario
Canada K8V 5S2
Tel: 800-545-6258
Fax: 800-527-5703

**Latin America
Tyco Thermal Controls**

7433 Harwin Drive
Houston, TX 77036
United States
Tel: 713-868-4800
Tel: 713-735-8645
Fax: 713-868-2333

**Europe, Middle East, Africa (EMEA)
Tyco Thermal Controls**

Romeinse Straat 14
3001 Leuven
België / Belgique
Tel: +32 16 213 511
Fax: +32 16 213 603

**Asia Pacific
Tyco Thermal Controls**

20F, Innovation Building,
1009 Yi Shan Rd,
Shanghai 200233,
P.R.China
Tel: +86 21 2412 1688
Fax: +86 21 5426 2937 / 5426 3167

Tyco, Alliance Integrated Systems, AMC, AutoMatrix, AutoSol, BTV, CapaciSense, Chemelex, DHSX, DigiTrace, DigiTrace logo, DigiTrace Supervisor, Duoterm, ElectroMelt, EM2XR, FHSM, FHSC, FlexFit, FlexiClic, Flowguard, FreezeTrace, FreezGuard, Frostex, Frostex Plus, Frostguard, FroStop, FSE, Gardian, HAK, Handvise, HBTv, HCCL, HotCap, HQTv, HTPG, HTPi, HWAT, HXTv, IceStop, Interlock, Isocable, Isodrum, Isoheat, Isomantle, Isopad, Isopad Frostguard, Isopad logo, Isopanel, Isotape, Isotherm, JBM, JBS, K-Flex, K-Flex logo, KHE, KHH, KHL, KHP, KTV, Labsafe, LBTv, LHC, LHFV, LHRV, Metabond, Mini WinterGard, Miser WinterGard, MoniTrace, Multi-plus, NGC, PetroTrace, PLI, PolyMatrix, Pyro CiC, PyroFLX, Pyromaster, Pyropak, Pyrosil, PyroSizer, Pyrotenax, Pyrotenax Designer, Pyrotenax logo, QTVR, QuickNet, QuickNet logo, QuickStat, QuickTerm, RayClic, RaySol, RayStat, Retro WinterGard, RHS, RHSC, RHSM, RMM2, SBF, SBV, SC, SHC, Sheathmaster, ShowerGuard, SLBTv, Smart Heat for Comfort and Safety, SnoCalc, SnoCalc logo, STS, System 500, System 1850, System 1850-SE, System 2000, System 2200, T2, T2 logo, T2Blue, T2QuickNet, T2Red, T2Reflecta, TankCalc Plus, TempBus, Thermoheat, ThermoLimit, Thermo-Line, Total Care in Heat-tracing, Touch, Trac-Loc, Trac Calc, TraceCalc Net, TraceCalc Net logo, TraceCalc Pro logo, TraceGuard 277, TraceMaster, Tracer, Tracer logo, TRACERLYNX, TRACERLYNX logo, TraceStat, TraceTek, TraceTek logo, TruckPak, VLBTv, VLKTv, VPL, We manage the heat you need, WinterGard, WinterGard logo, WinterGard Plus, WinterGard Wet, XL-ERATE, XL-ERATE logo, XL-Trace, XTV and Zero EMI are registered and/or unregistered trademarks of Tyco Thermal Controls LLC or its affiliates.

All other trademarks are the property of their respective owners.



Important: All information, including illustrations, is believed to be reliable. Users, however, should independently evaluate the suitability of each product for their particular application. Tyco Thermal Controls makes no warranties as to the accuracy or completeness of the information, and disclaims any liability regarding its use. Tyco Thermal Controls' only obligations are those in the Tyco Thermal Controls Standard Terms and Conditions of Sale for this product, and in no case will Tyco Thermal Controls or its distributors be liable for any incidental, indirect, or consequential damages arising from the sale, resale, use, or misuse of the product. Specifications are subject to change without notice. In addition, Tyco Thermal Controls reserves the right to make changes—without notification to Buyer—to processing or materials that do not affect compliance with any applicable specification.