

## Tank heating pads

Raychem brand tank heating pads (RHS) are designed for applications ranging from freeze protection to process-temperature maintenance of tanks.

Tyco Thermal Controls offers RHS tank heating pads with two power densities, making them ideal for metal tanks (lined and unlined) and plastic tanks.

FM Approvals and CSA International (CSA) have approved RHS tank heating pads for use in both nonhazardous and hazardous locations.


Compared to self-regulating heating cables, they offer a cost-effective solution in applications where even heat distribution is not required. They are not recommended for highly temperature-sensitive fluids.

RHS-L may be used on tank walls capable of a maintain temperature up to 120°F (49°C), and RHS-H may be used on tanks with walls capable of up to 200°F (93°C).

RHS is offered with two power densities, 1.9 W/in<sup>2</sup> and 0.6 W/in<sup>2</sup>.

Durable components make RHS tank heating pads:

- Easy to design and install
- Approved for use in nonhazardous and hazardous locations
- Highly reliable in the rugged environments of industrial plants

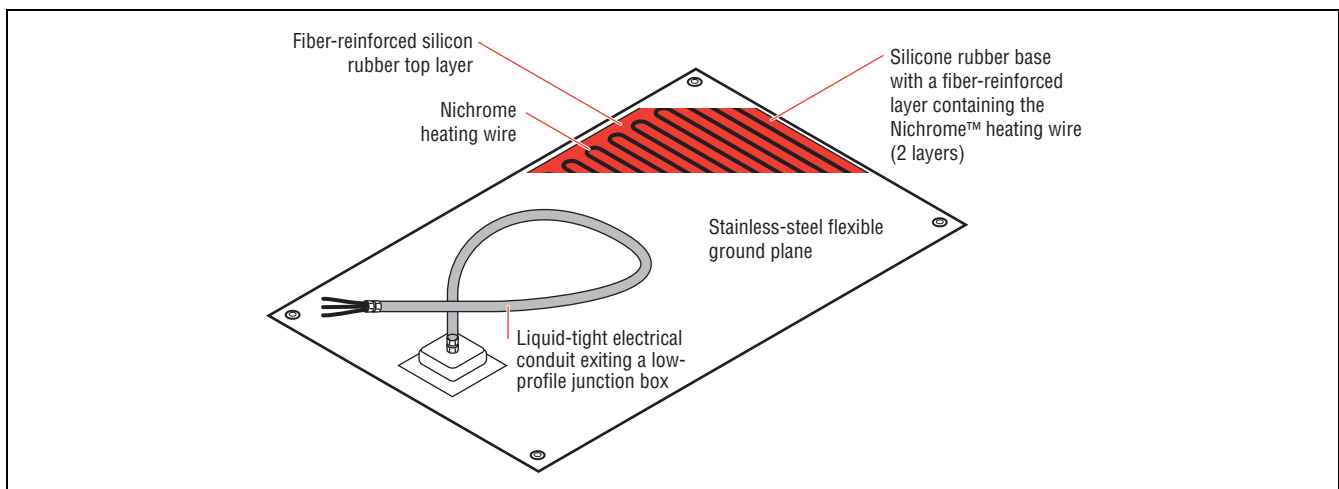

### Description

	RHS-H	RHS-L
	Flexible tank heating pad for unlined metal tanks	Flexible tank heating pad for metal and plastic tanks (lined and unlined)

### Kit Contents

One heating pad (1.9 W/in <sup>2</sup> ) with stainless-steel junction box and flexible conduit	One heating pad (0.6 W/in <sup>2</sup> ) with stainless-steel junction box and flexible conduit
---	---

### Approvals

#### Hazardous Locations



Class I, Div. 2, Groups B, C, D  
 Class II<sup>(1)</sup>, Div. 1 and 2, Groups E, F, G  
 Class III<sup>(1)</sup>

<sup>(1)</sup> Applications must be reviewed by the manufacturer.

**Product Specifications (nominal)**

<b>RHS-H</b>				
<b>Catalog number</b>	<b>Overall Dimensions</b>	<b>Voltage (Vac)</b>	<b>Power output (W)</b>	<b>Current draw (A)</b>
RHS-H-500-1	14" x 24" (356 mm x 610 mm)	120	500	4.2
RHS-H-1000-1	24" x 26" (610 mm x 660 mm)	120	1000	8.3
RHS-H-1400-1	24" x 36" (610 mm x 914 mm)	120	1400	11.7
RHS-H-500-2	14" x 24" (356 mm x 610 mm)	240	500	2.1
RHS-H-1000-2	24" x 26" (610 mm x 660 mm)	240	1000	4.2
RHS-H-1400-2	24" x 36" (610 mm x 914 mm)	240	1400	5.8

<b>RHS-L</b>				
<b>Catalog number</b>	<b>Overall Dimensions</b>	<b>Voltage (Vac)</b>	<b>Power output (W)</b>	<b>Current draw (A)</b>
RHS-L-150-1	14" x 24" (356 mm x 610 mm)	120	150	1.3
RHS-L-300-1	24" x 26" (610 mm x 660 mm)	120	300	2.5
RHS-L-420-1	24" x 36" (610 mm x 914 mm)	120	420	3.5
RHS-L-150-2	14" x 24" (356 mm x 610 mm)	240	150	0.6
RHS-L-300-2	24" x 26" (610 mm x 660 mm)	240	300	1.3
RHS-L-420-2	24" x 36" (610 mm x 914 mm)	240	420	1.8

Model	<b>RHS-H</b>		<b>RHS-L</b>	
	<b>RHS-H-1</b>	<b>RHS-H-2</b>	<b>RHS-L-1</b>	<b>RHS-L-2</b>
Nominal voltage (Vac)	120	240	120	240
Voltage range (Vac)	100–130	200–277	100–130	200–277
Power adjustment factor		208 Vac = 0.75 277 Vac = 1.33		
Watt density	1.9 W/in <sup>2</sup>		0.6 W/in <sup>2</sup>	
T-rating	T2C: 446°F (230°C)		T4A: 248°F (120°C)	
Maximum maintain temperature (power on)	200°F (93°C)		120°F (49°C)	
Maximum exposure temperature (power off)	366°F (186°C)		366°F (186°C)	
Minimum usage temperature	–40°F (–40°C)		–40°F (–40°C)	
Conduit length	4 ft (1.2 m)		4 ft (1.2 m)	
Application (See Design guide Doc# H56887 for limitations)	For use on metal tanks only		For use on metal, polypropylene, and fiber-reinforced plastic tanks	

**Materials of Construction**

Flexible grounding plane	Stainless steel
Rubber sheet	Vulcanized silicone rubber
Heating elements	Metal, embedded in glass-reinforced silicone rubber
Conduit material	Stainless steel

**Additional Materials Required**

RHS-INSTALLATION-KIT (P/N 844869-001)	The RHS installation kit contains a caulking gun, two RTV adhesive tubes, a wedge, one 30-foot roll of AT-180 aluminum tape, and a trowel for mounting up to two RHS tank heating pads. The kit is FM Approved and CSA Certified for use with RHS tank heating pads.
Temperature control device	Thermostat or other control system must be used.

**Worldwide Headquarters  
Tyco Thermal Controls**

7433 Harwin Drive  
Houston, TX 77036  
USA  
Tel: 800-545-6258  
Tel: 650-216-1526  
Fax: 800-527-5703  
Fax: 650-474-7711  
info@tycothermal.com  
www.tycothermal.com

**Canada  
Tyco Thermal Controls**

250 West St.  
Trenton, Ontario  
Canada K8V 5S2  
Tel: 800-545-6258  
Fax: 800-527-5703

**Europe, Middle East, Africa (EMEA)  
Tyco Thermal Controls**

Romeinse Straat 14  
3001 Leuven  
België / Belgique  
Tel: +32 16 213 511  
Fax: +32 16 213 603

**Latin America  
Tyco Thermal Controls**

7433 Harwin Drive  
Houston, TX 77036  
United States  
Tel: 713-868-4800  
Tel: 713-735-8645  
Fax: 713-868-2333

**Asia Pacific  
Tyco Thermal Controls**

20F, Innovation Building,  
1009 Yi Shan Rd,  
Shanghai 200233,  
P.R.China  
Tel: +86 21 2412 1688  
Fax: +86 21 5426 2937 / 5426 3167

Tyco, Alliance Integrated Systems, AMC, AutoMatrix, AutoSol, BTV, CapaciSense, Chemelex, DHSX, DigiTrace, DigiTrace logo, DigiTrace Supervisor, Duoterm, ElectroMelt, EM2XR, FHSM, FHSC, FlexFit, FlexiClic, Flowguard, FreezeTrace, FreezGard, Frostex, Flostex Plus, Frostguard, FroStop, FSE, Gardian, HAK, Handvise, HBTv, HCCL, HotCap, HQTv, HTPG, HTPi, HWAT, HXTv, IceStop, Interlock, Isocable, Isodrum, Isoheat, Isomantle, Isopad, Isopad Frostguard, Isopad logo, Isopanel, Isotape, Isotherm, JBM, JBS, K-Flex, K-Flex logo, KHE, KHH, KHL, KHP, KTV, Labsafe, LBTv, LHC, LHFV, LHRV, Metabond, Mini WinterGard, Miser WinterGard, MoniTrace, Multi-plus, NGC, PetroTrace, PLI, PolyMatrix, Pyro CiC, PyroFLX, Pyromaster, Pyropak, Pyrosil, PyroSizer, Pyrotenax, Pyrotenax Designer, Pyrotenax logo, QTVR, QuickNet, QuickNet logo, QuickStat, QuickTerm, RayClic, RaySol, RayStat, Retro WinterGard, RHS, RHSC, RHSM, RMM2, SBF, SBV, SC, SHC, Sheathmaster, ShowerGuard, ShrinkCap, ShrinkSeal, ShrinkSystems, ShrinkTool, ShrinkTube, SLBTv, SnoCalc, SnoCalc logo, STS, System 500, System 1850, System 1850-SE, System 2000, System 2200, T2, T2 logo, T2Blue, T2QuickNet, T2Red, T2Reflecta, TankCalc Plus, TempBus, Thermoheat, ThermoLimit, ThermoLine, Touch, Trac-Loc, TraceCalc, TraceCalc Net, TraceCalc Net logo, TraceCalc Pro logo, TraceGard 277, TraceMaster, Tracer, Tracer logo, TracerLynx, TracerLynx logo, TraceStat, TraceTek, TraceTek logo, TruckPak, VLBTv, VLKTV, VPL, We manage the heat you need, WinterGard, WinterGard logo, WinterGard Plus, WinterGard Wet, XL-Trace, XTV and Zero EMI are registered and/or unregistered trademarks of Tyco Thermal Controls LLC or its affiliates.

All other trademarks are the property of their respective owners.

**tyco**  
Thermal Controls

**Important:** All information, including illustrations, is believed to be reliable. Users, however, should independently evaluate the suitability of each product for their particular application. Tyco Thermal Controls makes no warranties as to the accuracy or completeness of the information, and disclaims any liability regarding its use. Tyco Thermal Controls' only obligations are those in the Tyco Thermal Controls Standard Terms and Conditions of Sale for this product, and in no case will Tyco Thermal Controls or its distributors be liable for any incidental, indirect, or consequential damages arising from the sale, resale, use, or misuse of the product. Specifications are subject to change without notice. In addition, Tyco Thermal Controls reserves the right to make changes—without notification to Buyer—to processing or materials that do not affect compliance with any applicable specification.