



TT3000

TraceTek® Sensing Cable for Conductive Liquids

TraceTek® TT3000 sensing cable detects the presence of conductive liquids at any point along its length. Most acids and bases and even deionized water can be sensed and located. Installed with a TraceTek alarm and locating module, the cable senses the presence of fluid, triggers an alarm, and pinpoints the location

Distributed sensing

TT3000 sensing cable provides distributed leak detection and location over a wide range of areas. The cable is available in a variety of lengths to provide as much coverage as needed.

Design flexibility

TT3000 sensing cable is available with factory-installed metal connectors that plug together. The measurement circuit is not dependent upon the conductivity of the leaking fluid. Therefore, the same cable will detect a wide range of fluids without special design considerations or calibration.


The cable is designed for a variety of applications, including floor surfaces, subfloors, equipment locations, pipes, storage tanks, and trenches. The cable is small, lightweight, and flexible, allowing easy installation. The smooth design allows quick drying.

Advanced technology

The Raychem® conductive-polymer technology and fluoropolymer construction make TT3000 sensing cable mechanically strong and chemically resistant. The cable is constructed of two sensing wires, an alarm signal wire, and a continuity wire embedded in a fluoropolymer carrier rod. This rugged construction exposes no metal, and enables the cable to be reused even in corrosive environments.


Ordering information

TT3000 zone sensing cable with factory-installed connector and end termination




Catalog Number	Part Number	Description
TT3000-1.5M/5FT-HSE-MC	238539-000	5 ft (1.5 m) sensing cable with preinstalled heat-shrink end termination, prepared for zone system

TT3000 modular sensing cable with factory-installed connectors



Catalog Number	Part Number	Description
TT3000-0.3M/1FT-MC	148983-000	1 ft (0.3 m) sensing cable
TT3000-1.5M/5FT-MC	262789-000	5 ft (1.5 m) sensing cable
TT3000-3M/10FT-MC	842667-000	10 ft (3 m) sensing cable
TT3000-4.5M/15FT-MC	792293-000	15 ft (4.5 m) sensing cable
TT3000-7.5M/25FT-MC	103619-000	25 ft (7.5 m) sensing cable
TT3000-15M/50FT-MC	048179-000	50 ft (15 m) sensing cable
TT3000-30M/100FT-MC	301795-000	100 ft (30 m) sensing cable

TT3000 bulk sensing cable for installation in double-containment piping (connector kits required)



Catalog Number	Part Number	Description
TT3000-SC	155707-000	Bulk sensing cable on reel Minimum length: 250 ft (75 m) Maximum length: 1000 ft (300 m)


Connector kits (not shown)

Catalog Number	Part Number	Description
TT3000-CK-MC-M/F (includes test tools)	999313-000	Components for five mated pairs of connectors
TT3000-CK-MC-M	415441-000	One pin-type connector
TT3000-CK-MC-F	494333-000	One socket-type connector

Notes:

- Refer to the *Product Selection Guide* (H55869) for other components of the TraceTek system.

TT3000 Sensing Cable for Conductive Liquids

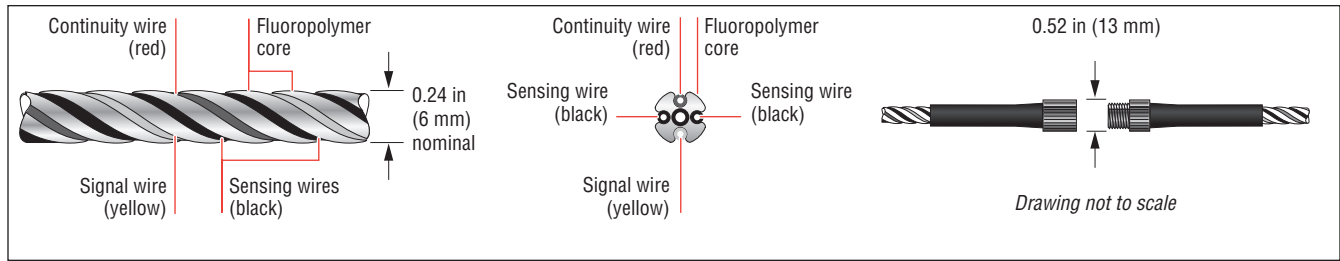

Product Characteristics

Cable diameter	0.24 in (6.0 mm) nominal
Cable diameter with connector	0.52 in (13 mm) nominal
Continuity and signal wires	2 x 26 AWG with fluoropolymer insulation
Sensing wires	2 x 30 AWG with conductive fluoropolymer jacket
Core	Fluoropolymer
Cable weight (50 ft/15 m length)	2.3 lb (1 kg)

Technical information

Breaking strength	160 lb (72 kg)
Cut-through force	>50 lb with 0.005 (>22 kg with 0.13 mm) in blade; crosshead speed 0.2 in/min
Abrasion resistance	>65 cycles per UL 719
Maximum continuous operating temperature	Sensing cable: 194°F (90°C) Cable connectors: 185°F (85°C)

Chemical resistance

Cable functions normally after exposure in accordance with ASTM D 543 at 77°F (25°C) for seven days:	Trichloroethylene	(100%)
	Sulfuric acid	(98%)
Note: Prolonged exposure to concentrated ketones may cause temporary reduction of sensitivity; consult factory.	Hydrochloric acid	(37%)
	Hexane	(100%)
	Methanol	(100%)
	Sodium hydroxide	(10%)
	Xylene (100%)	(100%)
	Aqua regia	

Radiation resistance

Cumulative radiation exposure of 10 megarad gamma radiation over design life of 30 years

Approvals and Certifications

TraceTek TT3000 sensing cables are approved for installation in ordinary and hazardous areas when used in conjunction with approved TraceTek monitoring equipment and zener safety barriers when appropriate.

All TraceTek sensing cables are designated as “simple apparatus” and included in the approval certification for TraceTek monitoring instruments.

Consult the specific data sheets and approval certificates for the TraceTek TTSIM-128, TTSIM-1, TTSIM-1A, TTSIM-2, TTC-1 and TT-FLASHER-BE for application limitations and specific area approvals and certifications.



Tyco and TraceTek are trademarks of Tyco Thermal Controls LLC or its affiliates.

Worldwide Headquarters

Tyco Thermal Controls
307 Constitution Drive
Menlo Park, CA 94025-1164
USA
Tel (800) 545-6258
Tel (650) 216-1526
Fax (800) 527-5703
Fax (650) 474-7215
info@tracetek.com
www.tracetek.com

Important: All information, including illustrations, is believed to be reliable. Users, however, should independently evaluate the suitability of each product for their particular application. Tyco Thermal Controls makes no warranties as to the accuracy or completeness of the information, and disclaims any liability regarding its use. Tyco Thermal Controls' only obligations are those in the Tyco Thermal Controls Standard Terms and Conditions of Sale for this product, and in no case will Tyco Thermal Controls or its distributors be liable for any incidental, indirect, or consequential damages arising from the sale, resale, use, or misuse of the product. Specifications are subject to change without notice. In addition, Tyco Thermal Controls reserves the right to make changes—without notification to Buyer—to processing or materials that do not affect compliance with any applicable specification.