


T2000 portable programming device for industrial locations

The PPD-IND (Portable Programming Device) provides the user with a convenient way to communicate to a DigiTrace® T2000 system equipped with an AC2000+ Alarm/Communications card. Using a Windows CE®-based industrial PDA

(Personal Digital Assistant), the kit includes everything that is required to connect to a T2000 system and provide an intuitive, graphical user interface for configuration and troubleshooting. Access to all AC2000+, CM2000, and CM2000+ parameters is

available, and communications cables are included to allow easy connection to your T2000 panel.

For devices intended for use in hazardous locations, refer to the DigiTrace PPD-HAZ.

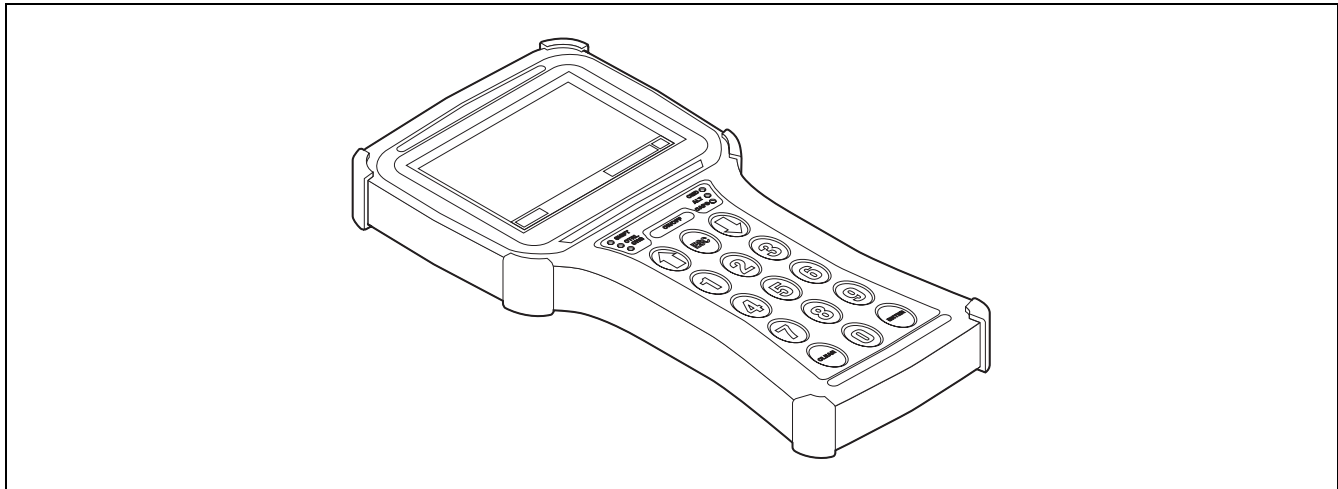

Specifications

System requirements	The application software comes pre-loaded onto the PDA provided. To install any future updates, you will need a PC with CD-ROM drive and Microsoft ActiveSync® software installed.
PDA	1/4VGA LCD with touchscreen Size: 9.8-in x 4.8-in (249 mm x 123 mm) Weight: 18 oz (510 g)
Environment	Nonhazardous locations only Operating temperature: 32°F to 122°F (0°C to 50°C) Drop tested to 3 ft (1 m)
Controller compatibility	When used in conjunction with a DigiTrace T2000 system equipped with an AC2000+ Alarm/Communications card, the device is compatible with all CM2000 and CM2000+ controller cards.
Warranty	PDA: Standard warranty directly from the PDA Manufacturer – 2 years Cables/software: Tyco Thermal Controls limited warranty applies
Electromagnetic Compatibility	FCC Part 15 Class A

Kit Contents

One industrial PDA with battery pack and charger, software CD, one 3 ft (1 m) PDA to AC2000+ communications cable for direct connection to the front panel of an AC2000+ card, one 3 ft (1 m) PDA to quick-release cable for connection to a T2000 panel mounted connector.