



Visit [www.tycothermal.com](http://www.tycothermal.com) for more information on our ten-year extended warranty.

# MI Heating Cable for Heat Loss Replacement, Floor Heating and Radiant Space Heating

D100  
OATO  
011A

## Standard copper and HDPE jacketed copper sheathed heating cables

**Pyrotenax copper and HDPE jacketed copper sheathed mineral insulated heating cables are designed for the following floor heating applications.**

*Heat-loss replacement* – replaces heat in concrete floors built over garages, loading docks, arcades, and other cold spaces. The cable is typically attached to the bottom of concrete floors.

*Comfort floor heating* – warms concrete, tile, stone and marble floors in lobbies, foyers, bathrooms, kitchens and gymnasiums. The cable is typically embedded in concrete or a thick mortar bed.


*Radiant space heating* – provides primary space heating for rooms with concrete floors. The cable is typically embedded in concrete or a thick mortar bed.

Type HLR heating cables are supplied with a copper sheath and are ideally suited for heat loss replacement applications. Types SUA, SUB and FH heating cables have a copper sheath that is covered with an extruded high-density polyethylene (HDPE) jacket and are suitable for applications where the cable is directly embedded in concrete or mortar floors.

The heating cables are factory assembled with an HDPE jacketed copper sheath cold lead, pre-terminated and ready to connect to a junction box. The copper sheath provides an ideal ground path and allows for a rugged yet flexible heating cable that is easy to install.

The radiant heat provided by the Pyrotenax heating cable allows you to feel comfortable at lower air temperatures, resulting in lower heating costs.

Tyco Thermal Controls representatives can provide design assistance and help you install the product that meets your goals for an efficient, cost-effective floor heating system.

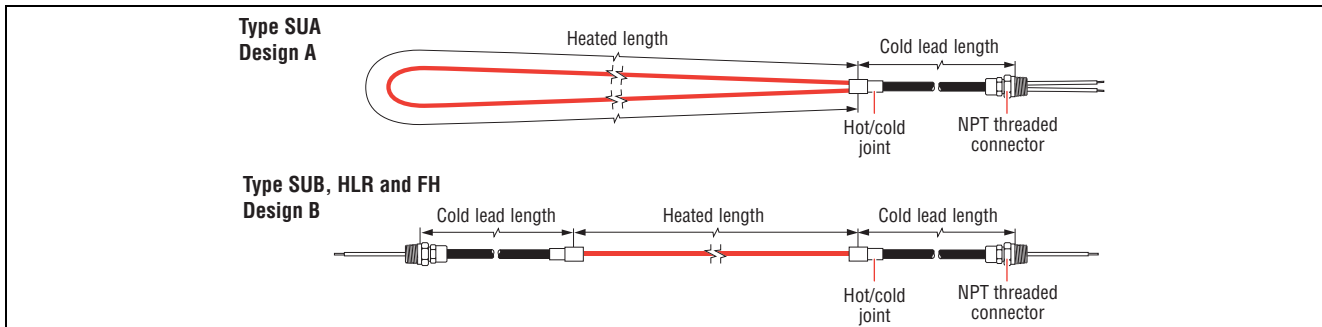

### Cable Construction

#### Type HLR heating cable

Sheath	Seamless copper
Insulation	Magnesium oxide
Conductor type	Alloy or copper
Number of conductors	1
Insulation voltage rating	600 V
Cable diameter (without jacket)	0.152 to 0.205 in (3.9 to 5.2 mm)

#### Types SUA, SUB and FH heating cable

Jacket	HDPE
Sheath	Seamless copper
Insulation	Magnesium oxide
Conductor type	Alloy or copper
Number of conductors	1
Insulation voltage rating	600 V
Cable diameter (with jacket)	0.232 to 0.303 in (5.9 to 7.7 mm)

#### Cold lead (Type SUA/SUB/HLR/FH cables)

Jacket	HDPE
Sheath	Seamless copper
Insulation	Magnesium oxide

Conductor type	Copper
Number of conductors	1 or 2
Insulation voltage rating	600 V
Cable diameter (with jacket)	0.310 to 0.420 in (7.9 to 10.7 mm)
Gland size (NPT)	1/2 in
Tail length	12 in (30 mm)
<b>Minimum installation temperature</b>	-4°F (-20°C)
<b>Minimum bending radius</b>	6 times cable diameter

**Type HLR - Heat Loss Replacement Cable Specifications (Made to order)**

Catalog number	Config-uration	Heating cable reference	Heated length		Nominal power (watts)	Cable voltage (volts)	Cold lead length <sup>1</sup>		Cold lead code	Joint type	Nominal cable diameter		Resistance <sup>2</sup> (ohms)	Tail size (AWG)
			(ft)	(m)			(ft)	(m)			(in)	(mm)		
<b>120 Volts and 208 Volts, 3-phase Wye</b>														
HLR1	B	61CD3610	70	21.3	330	120	15	4.6	H25A	Y	0.152	3.9	43.6	14
HLR2	B	61CD3610	44	13.4	540	120	15	4.6	H25A	Y	0.152	3.9	26.7	14
HLR3	B	61CD3390	55	16.8	670	120	15	4.6	H25A	Y	0.162	4.1	21.5	14
HLR4	B	61CD3300	63	19.2	760	120	15	4.6	H25A	Y	0.160	4.1	18.9	14
HLR5	B	61CD3200	77	23.5	935	120	15	4.6	H25A	Y	0.168	4.3	15.4	14
HLR6	B	61CE3150	89	27.1	1080	120	15	4.6	H25A	Y	0.170	4.3	13.3	14
HLR7	B	61CE3105	106	32.3	1295	120	15	4.6	H25A	Y	0.174	4.4	11.1	14
HLR8	B	61CE4800	122	37.2	1475	120	15	4.6	H25A	Y	0.182	4.6	9.8	14
HLR9	B	61CE4600	140	42.7	1715	120	15	4.6	H25A	Y	0.194	4.9	8.4	14
HLR10	B	61CE4400	172	52.4	2100	120	15	4.6	H25A	Y	0.185	4.7	6.9	14
HLR11	B	61CE4300	198	60.4	2425	120	15	4.6	H25A	Y	0.192	4.9	5.9	14
HLR12	B	61CE4200	244	74.4	2950	120	15	4.6	H30A	Y	0.205	5.2	4.9	12
HLR13	B	61CC4100	322	98.2	3925	120	15	4.6	H40A	Y	0.198	5.0	3.7	10
<b>208 Volts</b>														
HLR14	B	61CD3610	76	23.2	935	208	15	4.6	H25A	Y	0.152	3.9	46.3	14
HLR15	B	61CD3390	95	29.0	1170	208	15	4.6	H25A	Y	0.162	4.1	37.0	14
HLR16	B	61CD3300	109	33.2	1325	208	15	4.6	H25A	Y	0.160	4.1	32.7	14
HLR17	B	61CD3200	133	40.5	1625	208	15	4.6	H25A	Y	0.168	4.3	26.6	14
HLR18	B	61CE3150	154	47.0	1875	208	15	4.6	H25A	Y	0.170	4.3	23.1	14
HLR19	B	61CE3105	184	56.1	2240	208	15	4.6	H25A	Y	0.174	4.4	19.3	14
HLR20	B	61CE4800	211	64.3	2565	208	15	4.6	H25A	Y	0.182	4.6	16.9	14
HLR21	B	61CE4600	243	74.1	2970	208	15	4.6	H25A	Y	0.194	4.9	14.6	14
HLR22	B	61CE4400	296	90.2	3655	208	15	4.6	H25A	Y	0.185	4.7	11.8	14
HLR23	B	61CE4300	345	105.2	4180	208	15	4.6	H25A	Y	0.192	4.9	10.4	14
HLR24	B	61CE4200	420	128.0	5150	208	15	4.6	H30A	Y	0.205	5.2	8.4	12
HLR25	B	61CC4100	560	170.7	6780	208	15	4.6	H40A	Y	0.198	5.0	6.4	10
<b>240 Volts</b>														
HLR26	B	61CD3610	88	26.8	1075	240	15	4.6	H25A	Y	0.152	3.9	53.6	14
HLR27	B	61CD3390	110	33.5	1345	240	15	4.6	H25A	Y	0.162	4.1	42.8	14
HLR28	B	61CD3300	125	38.1	1535	240	15	4.6	H25A	Y	0.160	4.1	37.5	14
HLR29	B	61CD3200	153	46.6	1880	240	15	4.6	H25A	Y	0.168	4.3	30.6	14
HLR30	B	61CE3150	177	54.0	2170	240	15	4.6	H25A	Y	0.170	4.3	26.5	14
HLR31	B	61CE3105	212	64.6	2590	240	15	4.6	H25A	Y	0.174	4.4	22.2	14
HLR32	B	61CE4800	243	74.1	2965	240	15	4.6	H25A	Y	0.182	4.6	19.4	14
HLR33	B	61CE4600	280	85.4	3430	240	15	4.6	H25A	Y	0.194	4.9	16.8	14
HLR34	B	61CE4400	345	105.2	4175	240	15	4.6	H25A	Y	0.185	4.7	13.8	14
HLR35	B	61CE4300	395	120.4	4860	240	15	4.6	H25A	Y	0.192	4.9	11.9	14
HLR36	B	61CE4200	485	147.9	5940	240	15	4.6	H30A	Y	0.205	5.2	9.7	12

<sup>1</sup> To modify cold lead length, contact your Tyco Thermal Controls sales representative.

<sup>2</sup> Resistance tolerance: +/- 10%

Tolerance on heating cable length: -0% to +3%

**Type HLR - Heat Loss Replacement Cable Specifications (Made to order) (Continued)**

Catalog number	Config-uration	Heating cable reference	Heated length		Nominal power (watts)	Cable voltage (volts)	Cold lead length <sup>1</sup>		Cold lead code	Joint type	Nominal cable diameter		Resis-tance <sup>2</sup> (ohms)	Tail size (AWG)
			(ft)	(m)			(ft)	(m)			(in)	(mm)		
HLR37	B	61CC4100	640	195.1	7900	240	15	4.6	H40A	Y	0.198	5.0	7.3	10
<b>277 Volts and 480 Volts, 3-phase Wye</b>														
HLR38	B	61CD3610	102	31.1	1235	277	15	4.6	H25A	Y	0.152	3.9	62.1	14
HLR39	B	61CD3390	127	38.7	1550	277	15	4.6	H25A	Y	0.162	4.1	49.5	14
HLR40	B	61CD3300	145	44.2	1765	277	15	4.6	H25A	Y	0.160	4.1	43.5	14
HLR41	B	61CD3200	177	54.0	2170	277	15	4.6	H25A	Y	0.168	4.3	35.4	14
HLR42	B	61CE3150	205	62.5	2495	277	15	4.6	H25A	Y	0.170	4.3	30.8	14
HLR43	B	61CE3105	245	74.7	2985	277	15	4.6	H25A	Y	0.174	4.4	25.7	14
HLR44	B	61CE4800	280	85.4	3425	277	15	4.6	H25A	Y	0.182	4.6	22.4	14
HLR45	B	61CE4600	325	99.1	3935	277	15	4.6	H25A	Y	0.194	4.9	19.5	14
HLR46	B	61CE4400	396	120.7	4845	277	15	4.6	H25A	Y	0.185	4.7	15.8	14
HLR47	B	61CE4300	460	140.2	5560	277	15	4.6	H25A	Y	0.192	4.9	13.8	14
HLR48	B	61CE4200	560	170.7	6850	277	15	4.6	H30A	Y	0.205	5.2	11.2	12
HLR49	B	61CC4100	740	225.6	9100	277	15	4.6	H40A	Y	0.198	5.0	8.4	10
<b>347 Volts and 600 Volts, 3-phase Wye</b>														
HLR50	B	61CD3610	127	38.7	1560	347	15	4.6	H25A	Y	0.152	3.9	77.2	14
HLR51	B	61CD3390	160	48.8	1930	347	15	4.6	H25A	Y	0.162	4.1	62.4	14
HLR52	B	61CD3300	182	55.5	2205	347	15	4.6	H25A	Y	0.160	4.1	54.6	14
HLR53	B	61CD3200	222	67.7	2715	347	15	4.6	H25A	Y	0.168	4.3	44.3	14
HLR54	B	61CE3150	258	78.7	3110	347	15	4.6	H25A	Y	0.170	4.3	38.7	14
HLR55	B	61CE3105	306	93.3	3750	347	15	4.6	H25A	Y	0.174	4.4	32.1	14
HLR56	B	61CE4800	350	106.7	4300	347	15	4.6	H25A	Y	0.182	4.6	28.0	14
HLR57	B	61CE4600	405	123.5	4955	347	15	4.6	H25A	Y	0.194	4.9	24.3	14
HLR58	B	61CE4400	495	150.9	6080	347	15	4.6	H25A	Y	0.185	4.7	19.8	14
HLR59	B	61CE4300	575	175.3	6980	347	15	4.6	H25A	Y	0.192	4.9	17.3	14
HLR60	B	61CE4200	700	213.4	8600	347	15	4.6	H30A	Y	0.205	5.2	14.0	12
<b>480 Volts</b>														
HLR61	B	61CD3610	175	53.4	2160	480	15	4.6	H25A	Y	0.152	3.9	106.7	14
HLR62	B	61CD3390	220	67.1	2685	480	15	4.6	H25A	Y	0.162	4.1	85.8	14
HLR63	B	61CD3300	250	76.2	3070	480	15	4.6	H25A	Y	0.160	4.1	75.0	14
HLR64	B	61CD3200	306	93.3	3770	480	15	4.6	H25A	Y	0.168	4.3	61.1	14
HLR65	B	61CE3150	355	108.2	4330	480	15	4.6	H25A	Y	0.170	4.3	53.2	14
HLR66	B	61CE3105	424	129.3	5175	480	15	4.6	H25A	Y	0.174	4.4	44.5	14
HLR67	B	61CE4800	485	147.9	5940	480	15	4.6	H25A	Y	0.182	4.6	38.8	14
HLR68	B	61CE4600	560	170.7	6860	480	15	4.6	H25A	Y	0.194	4.9	33.6	14
HLR69	B	61CE4400	690	210.4	8350	480	15	4.6	H25A	Y	0.185	4.7	27.6	14
<b>600 Volts</b>														
HLR70	B	61CD3610	220	67.1	2685	600	15	4.6	H25A	Y	0.152	3.9	134.1	14
HLR71	B	61CD3390	275	83.8	3360	600	15	4.6	H25A	Y	0.162	4.1	107.1	14
HLR72	B	61CD3300	313	95.4	3835	600	15	4.6	H25A	Y	0.160	4.1	93.9	14
HLR73	B	61CD3200	384	117.1	4690	600	15	4.6	H25A	Y	0.168	4.3	76.8	14
HLR74	B	61CE3150	443	135.1	5420	600	15	4.6	H25A	Y	0.170	4.3	66.4	14
HLR75	B	61CE3105	530	161.6	6470	600	15	4.6	H25A	Y	0.174	4.4	55.6	14
HLR76	B	61CE4800	605	184.5	7440	600	15	4.6	H25A	Y	0.182	4.6	48.4	14
HLR77	B	61CE4600	700	213.4	8570	600	15	4.6	H25A	Y	0.194	4.9	42.0	14

<sup>1</sup> To modify cold lead length, contact your Tyco Thermal Controls sales representative.<sup>2</sup> Resistance tolerance: +/- 10%

Tolerance on heating cable length: -0% to +3%

**Type SUA/SUB - Floor Heating and Radiant Space Heating Cable Specifications (Factory Inventory)**

Catalog number	Config-uration	Heating cable reference	Heated length		Nominal power (watts)	Cable voltage (volts)	Cold lead length <sup>1</sup>		Cold lead code	Joint type	Nominal cable diameter		Resis-tance <sup>2</sup> (ohms)	Tail size (AWG)
			(ft)	(m)			(ft)	(m)			(in)	(mm)		
<b>120 Volts and 208 Volts, 3-phase Wye</b>														
SUA2	A	61HD3610	55	16.8	425	120	7	2.1	LH21A	Y	0.232	5.9	33.6	14
SUA3	A	61HD3200	140	42.7	500	120	7	2.1	LH21A	Y	0.248	6.3	28.0	14
SUA4	A	61HD3390	68	20.7	550	120	7	2.1	LH21A	Y	0.242	6.1	26.5	14
SUA7	A	61HD3200	95	29.0	750	120	7	2.1	LH21A	Y	0.248	6.3	19.0	14
SUA8	A	61HE3105	177	54.0	800	120	7	2.1	LH21A	Y	0.254	6.5	18.6	14
SUB1	B	61HE3105	132	40.2	1000	120	15	4.6	H25A	Y	0.254	6.5	13.9	14
SUB2	B	61HE4600	240	73.2	1000	120	15	4.6	H25A	Y	0.274	7.0	14.4	14
SUB3	B	61HE4400	280	85.4	1300	120	15	4.6	H30A	Y	0.265	6.7	11.2	12
SUB4	B	61HE4300	320	97.6	1500	120	15	4.6	H30A	Y	0.272	6.9	9.6	12
SUB5	B	61HE4300	260	79.3	1800	120	15	4.6	H40A	Y	0.272	6.9	7.8	10
SUB6	B	61HE4200	375	114.3	1900	120	15	4.6	H40A	Y	0.285	7.2	7.5	10
SUB7	B	61HE4200	310	94.5	2300	120	15	4.6	H40A	Y	0.285	7.2	6.2	10
SUB8	B	61HC4100	550	167.7	2300	120	15	4.6	H60A	Y	0.278	7.1	6.3	8
SUB9	B	61HC5651	630	192.1	3000	120	15	4.6	H60A	Y	0.285	7.2	4.7	8
SUB10	B	61HC5409	717	218.6	4300	120	15	4.6	H80A	Y	0.303	7.7	3.3	6
<b>208 Volts</b>														
SUA1	A	61HD3610	108	32.9	650	208	7	2.1	LH21A	Y	0.232	5.9	65.9	14
SUA6	A	61HE3105	264	80.5	1650	208	7	2.1	LH21A	Y	0.254	6.5	27.7	14
SUB19	B	61HD3200	245	74.7	885	208	15	4.6	H25A	Y	0.248	6.3	49.0	14
SUB20	B	61HE3105	340	103.7	1210	208	15	4.6	H25A	Y	0.254	6.5	35.7	14
SUB21	B	61HE4600	440	134.1	1640	208	15	4.6	H25A	Y	0.274	7.0	26.4	14
SUB22	B	61HE4400	525	160.1	2060	208	15	4.6	H25A	Y	0.265	6.7	21.0	14
<b>240 Volts</b>														
SUA1	A	61HD3610	108	32.9	900	240	7	2.1	LH21A	Y	0.232	5.9	65.9	14
SUA6	A	61HE3105	264	80.5	2100	240	7	2.1	LH21A	Y	0.254	6.5	27.7	14
SUB19	B	61HD3200	245	74.7	1175	240	15	4.6	H25A	Y	0.248	6.3	49.0	14
SUB20	B	61HE3105	340	103.7	1615	240	15	4.6	H25A	Y	0.254	6.5	35.7	14
SUB21	B	61HE4600	440	134.1	2180	240	15	4.6	H25A	Y	0.274	7.0	26.4	14
SUB22	B	61HE4400	525	160.1	2745	240	15	4.6	H25A	Y	0.265	6.7	21.0	14
<b>277 Volts and 480 Volts, 3-phase Wye</b>														
SUB19	B	61HD3200	245	74.7	1565	277	15	4.6	H25A	Y	0.248	6.3	49.0	14
SUB20	B	61HE3105	340	103.7	2150	277	15	4.6	H25A	Y	0.254	6.5	35.7	14
SUB21	B	61HE4600	440	134.1	2900	277	15	4.6	H25A	Y	0.274	7.0	26.4	14
SUB22	B	61HE4400	525	160.1	3650	277	15	4.6	H25A	Y	0.265	6.7	21.0	14
<b>347 Volts and 600 Volts, 3-phase Wye</b>														
SUB11	B	61HD3390	225	68.6	1400	347	15	4.6	H25A	Y	0.242	6.1	87.8	14
SUB12	B	61HD3200	310	94.5	1950	347	15	4.6	H25A	Y	0.248	6.3	62.0	14
SUB13	B	61HE3105	428	130.5	2700	347	15	4.6	H25A	Y	0.254	6.5	44.9	14
SUB14	B	61HE4600	548	167.1	3700	347	15	4.6	H25A	Y	0.274	7.0	32.9	14

<sup>1</sup> To modify cold lead length, contact your Tyco Thermal Controls sales representative.

<sup>2</sup> Resistance tolerance: +/- 10%

Tolerance on heating cable length: -0% to +3%

**Type FH - Floor Heating and Radiant Space Heating Cable Specifications (Made to Order)**

Catalog number	Config-uration	Heating cable reference	Heated length		Nominal power (watts)	Cable voltage (volts)	Cold lead length <sup>1</sup>		Cold lead code	Joint type	Nominal cable diameter		Resis-tance <sup>2</sup> (ohms)	Tail size (AWG)
			(ft)	(m)			(ft)	(m)			(in)	(mm)		
<b>120 Volts and 208 Volts, 3-phase Wye</b>														
FH1	B	61HD3610	54	16.5	440	120	15	4.6	H25A	Y	0.232	5.9	32.9	14
FH2	B	61HD3390	68	20.7	545	120	15	4.6	H25A	Y	0.242	6.1	26.5	14
FH3	B	61HD3300	77	23.5	625	120	15	4.6	H25A	Y	0.240	6.1	23.1	14
FH4	B	61HD3200	95	29.0	760	120	15	4.6	H25A	Y	0.248	6.3	19.0	14
FH5	B	61HE3150	109	33.2	880	120	15	4.6	H25A	Y	0.250	6.4	16.4	14
FH6	B	61HE3105	130	39.6	1055	120	15	4.6	H25A	Y	0.254	6.5	13.7	14
FH7	B	61HE4800	150	45.7	1200	120	15	4.6	H25A	Y	0.262	6.7	12.0	14
FH8	B	61HE4600	173	52.7	1390	120	15	4.6	H25A	Y	0.274	7.0	10.4	14
FH9	B	61HE4400	210	64.0	1715	120	15	4.6	H25A	Y	0.265	6.7	8.4	14
FH10	B	61HE4300	245	74.7	1960	120	15	4.6	H25A	Y	0.272	6.9	7.4	14
FH11	B	61HE4200	300	91.5	2400	120	15	4.6	H25A	Y	0.285	7.2	6.0	14
<b>208 Volts</b>														
FH12	B	61HD3610	94	28.7	755	208	15	4.6	H25A	Y	0.232	5.9	57.3	14
FH13	B	61HD3390	118	36.0	940	208	15	4.6	H25A	Y	0.242	6.1	46.0	14
FH14	B	61HD3300	134	40.9	1075	208	15	4.6	H25A	Y	0.240	6.1	40.2	14
FH15	B	61HD3200	164	50.0	1320	208	15	4.6	H25A	Y	0.248	6.3	32.8	14
FH16	B	61HE3150	190	57.9	1520	208	15	4.6	H25A	Y	0.250	6.4	28.5	14
FH17	B	61HE3105	225	68.6	1830	208	15	4.6	H25A	Y	0.254	6.5	23.6	14
FH18	B	61HE4800	260	79.3	2080	208	15	4.6	H25A	Y	0.262	6.7	20.8	14
FH19	B	61HE4600	300	91.5	2400	208	15	4.6	H25A	Y	0.274	7.0	18.0	14
FH20	B	61HE4400	365	111.3	2960	208	15	4.6	H25A	Y	0.265	6.7	14.6	14
FH21	B	61HE4300	425	129.6	3390	208	15	4.6	H25A	Y	0.272	6.9	12.8	14
FH22	B	61HE4200	520	158.5	4160	208	15	4.6	H25A	Y	0.285	7.2	10.4	14
<b>240 Volts</b>														
FH23	B	61HD3610	108	32.9	875	240	15	4.6	H25A	Y	0.232	5.9	65.9	14
FH24	B	61HD3390	135	41.2	1095	240	15	4.6	H25A	Y	0.242	6.1	52.7	14
FH25	B	61HD3300	155	47.3	1240	240	15	4.6	H25A	Y	0.240	6.1	46.5	14
FH26	B	61HD3200	190	57.9	1515	240	15	4.6	H25A	Y	0.248	6.3	38.0	14
FH27	B	61HE3150	215	65.5	1785	240	15	4.6	H25A	Y	0.250	6.4	32.3	14
FH28	B	61HE3105	260	79.3	2110	240	15	4.6	H25A	Y	0.254	6.5	27.3	14
FH29	B	61HE4800	300	91.5	2400	240	15	4.6	H25A	Y	0.262	6.7	24.0	14
FH30	B	61HE4600	345	105.2	2780	240	15	4.6	H25A	Y	0.274	7.0	20.7	14
FH31	B	61HE4400	420	128.0	3430	240	15	4.6	H25A	Y	0.265	6.7	16.8	14
FH32	B	61HE4300	490	149.4	3920	240	15	4.6	H25A	Y	0.272	6.9	14.7	14
FH33	B	61HE4200	600	182.9	4800	240	15	4.6	H25A	Y	0.285	7.2	12.0	14
<b>277 Volts and 480 Volts, 3-phase Wye</b>														
FH34	B	61HD3610	125	38.1	1005	277	15	4.6	H25A	Y	0.232	5.9	76.3	14
FH35	B	61HD3390	155	47.3	1270	277	15	4.6	H25A	Y	0.242	6.1	60.5	14
FH36	B	61HD3300	178	54.3	1440	277	15	4.6	H25A	Y	0.240	6.1	53.4	14
FH37	B	61HD3200	218	66.5	1760	277	15	4.6	H25A	Y	0.248	6.3	43.6	14
FH38	B	61HE3150	253	77.1	2020	277	15	4.6	H25A	Y	0.250	6.4	38.0	14
FH39	B	61HE3105	300	91.5	2435	277	15	4.6	H25A	Y	0.254	6.5	31.5	14
FH40	B	61HE4800	345	105.2	2780	277	15	4.6	H25A	Y	0.262	6.7	27.6	14
FH41	B	61HE4600	400	122.0	3200	277	15	4.6	H25A	Y	0.274	7.0	24.0	14
FH42	B	61HE4400	490	149.4	3915	277	15	4.6	H25A	Y	0.265	6.7	19.6	14
FH43	B	61HE4300	564	172.0	4535	277	15	4.6	H25A	Y	0.272	6.9	16.9	14
FH44	B	61HE4200	690	210.4	5560	277	15	4.6	H25A	Y	0.285	7.2	13.8	14

<sup>1</sup> To modify cold lead length, contact your Tyco Thermal Controls sales representative.<sup>2</sup> Resistance tolerance: +/- 10%

Tolerance on heating cable length: -0% to +3%

**Type FH - Floor Heating and Radiant Space Heating Cable Specifications (Made to Order)**

Catalog number	Config-uration	Heating cable reference	Heated length		Nominal power (watts)	Cable voltage (volts)	Cold lead length <sup>1</sup>		Cold lead code	Joint type	Nominal cable diameter		Resistance <sup>2</sup> (ohms)	Tail size (AWG)
			(ft)	(m)			(ft)	(m)			(in)	(mm)		
<b>347 Volts and 600 Volts, 3-phase Wye</b>														
FH45	B	61HD3610	155	47.3	1275	347	15	4.6	H25A	Y	0.232	5.9	94.6	14
FH46	B	61HD3390	195	59.5	1585	347	15	4.6	H25A	Y	0.242	6.1	76.1	14
FH47	B	61HD3300	220	67.1	1825	347	15	4.6	H25A	Y	0.240	6.1	66.0	14
FH48	B	61HD3200	270	82.3	2230	347	15	4.6	H25A	Y	0.248	6.3	54.0	14
FH49	B	61HE3150	315	96.0	2550	347	15	4.6	H25A	Y	0.250	6.4	47.3	14
FH50	B	61HE3105	376	114.6	3050	347	15	4.6	H25A	Y	0.254	6.5	39.5	14
FH51	B	61HE4800	430	131.1	3500	347	15	4.6	H25A	Y	0.262	6.7	34.4	14
FH52	B	61HE4600	497	151.5	4040	347	15	4.6	H25A	Y	0.274	7.0	29.8	14
FH53	B	61HE4400	610	186.0	4935	347	15	4.6	H25A	Y	0.265	6.7	24.4	14
FH54	B	61HE4300	710	216.5	5650	347	15	4.6	H25A	Y	0.272	6.9	21.3	14
<b>480 Volts</b>														
FH55	B	61HD3610	215	65.5	1760	480	15	4.6	H25A	Y	0.232	5.9	131.2	14
FH56	B	61HD3390	270	82.3	2190	480	15	4.6	H25A	Y	0.242	6.1	105.3	14
FH57	B	61HD3300	310	94.5	2480	480	15	4.6	H25A	Y	0.240	6.1	93.0	14
FH58	B	61HD3200	380	115.9	3030	480	15	4.6	H25A	Y	0.248	6.3	76.0	14
FH59	B	61HE3150	435	132.6	3530	480	15	4.6	H25A	Y	0.250	6.4	65.3	14
FH60	B	61HE3105	520	158.5	4220	480	15	4.6	H25A	Y	0.254	6.5	54.6	14
FH61	B	61HE4800	600	182.9	4800	480	15	4.6	H25A	Y	0.262	6.7	48.0	14
FH62	B	61HE4600	690	210.4	5565	480	15	4.6	H25A	Y	0.274	7.0	41.4	14
<b>600 Volts</b>														
FH63	B	61HD3610	270	82.3	2185	600	15	4.6	H25A	Y	0.232	5.9	164.7	14
FH64	B	61HD3390	340	103.7	2715	600	15	4.6	H25A	Y	0.242	6.1	132.6	14
FH65	B	61HD3300	385	117.4	3120	600	15	4.6	H25A	Y	0.240	6.1	115.5	14
FH66	B	61HD3200	470	143.3	3830	600	15	4.6	H25A	Y	0.248	6.3	94.0	14
FH67	B	61HE3150	545	166.2	4400	600	15	4.6	H25A	Y	0.250	6.4	81.8	14
FH68	B	61HE3105	650	198.2	5275	600	15	4.6	H25A	Y	0.254	6.5	68.3	14

<sup>1</sup> To modify cold lead length, contact your Tyco Thermal Controls sales representative.

<sup>2</sup> Resistance tolerance: +/- 10%

Tolerance on heating cable length: -0% to +3%

**Approvals**



**Note:** For heat loss replacement applications where the cable is attached to the bottom of the concrete floor, contact Tyco Thermal Controls for additional information.

**Ground-Fault Protection**

To minimize the danger of fire from sustained electrical arcing if the heating cable is damaged or improperly installed, and to comply with the requirements of Tyco Thermal Controls, agency certifications, and national electrical codes, ground-fault equipment protection must be used on each heating cable branch circuit. Arcing may not be stopped by conventional circuit protection. Many DigiTrace control and monitoring systems meet the ground-fault protection requirement.

**Worldwide Headquarters  
Tyco Thermal Controls**

7433 Harwin Drive  
Houston, TX 77036  
USA  
Tel: 800-545-6258  
Tel: 650-216-1526  
Fax: 800-527-5703  
Fax: 650-474-7711  
info@tycothermal.com  
www.tycothermal.com

**Canada  
Tyco Thermal Controls**

250 West St.  
Trenton, Ontario  
Canada K8V 5S2  
Tel: 800-545-6258  
Fax: 800-527-5703

**Europe, Middle East, Africa (EMEA)  
Tyco Thermal Controls**

Romeinse Straat 14  
3001 Leuven  
België / Belgique  
Tel: +32 16 213 511  
Fax: +32 16 213 603

**Latin America  
Tyco Thermal Controls**

7433 Harwin Drive  
Houston, TX 77036  
United States  
Tel: 713-868-4800  
Tel: 713-735-8645  
Fax: 713-868-2333

**Asia Pacific  
Tyco Thermal Controls**

20F, Innovation Building,  
1009 Yi Shan Rd,  
Shanghai 200233,  
P.R.China  
Tel: +86 21 2412 1688  
Fax: +86 21 5426 2937 / 5426 3167

Tyco, Alliance Integrated Systems, AMC, AutoMatrix, AutoSol, BTV, CapaciSense, Chemelex, DHSX, DigiTrace, DigiTrace logo, DigiTrace Supervisor, Duoterm, ElectroMelt, EM2XR, FHSM, FHSC, FlexFit, FlexiClic, Flowguard, FreezeTrace, FreezGuard, Frostex, Frostex Plus, Frostguard, FroStop, FSE, Gardian, HAK, Handvise, HBTv, HCCL, HotCap, HQTv, HTPG, HTPi, HWAT, HXTv, IceStop, Interlock, Isocable, Isodrum, Isoheat, Isomantle, Isopad, Isopad Frostguard, Isopad logo, Isopanel, Isotape, Isotherm, JBM, JBS, K-Flex, K-Flex logo, KHE, KHH, KHL, KHP, KTV, Labsafe, LBTv, LHC, LHFV, LHRV, Metabond, Mini WinterGard, Miser WinterGard, MoniTrace, Multi-plus, NGC, PetroTrace, PLI, PolyMatrix, Pyro CiC, PyroFLX, Pyromaster, Pyropak, Pyrosil, PyroSizer, Pyrotenax, Pyrotenax Designer, Pyrotenax logo, QTVR, QuickNet, QuickNet logo, QuickStat, QuickTerm, RayClic, RaySol, RayStat, Retro WinterGard, RHS, RHSC, RHSM, RMM2, SBF, SBV, SC, SHC, Sheathmaster, ShowerGuard, SLBTv, Smart Heat for Comfort and Safety, SnoCalc, SnoCalc logo, STS, System 500, System 1850, System 1850-SE, System 2000, System 2200, T2, T2 logo, T2Blue, T2QuickNet, T2Red, T2Reflecta, TankCalc Plus, TempBus, Thermoheat, ThermoLimit, Thermo-Line, Total Care in Heat-tracing, Touch, Trac-Loc, Trac Calc, TraceCalc Net, TraceCalc Net logo, TraceCalc Pro logo, TraceGuard 277, TraceMaster, Tracer, Tracer logo, TRACERLYNX, TRACERLYNX logo, TraceStat, TraceTek, TraceTek logo, TruckPak, VLBTv, VLKTv, VPL, We manage the heat you need, WinterGard, WinterGard logo, WinterGard Plus, WinterGard Wet, XL-ERATE, XL-ERATE logo, XL-Trace, XTV and Zero EMI are registered and/or unregistered trademarks of Tyco Thermal Controls LLC or its affiliates.

All other trademarks are the property of their respective owners.



**Important:** All information, including illustrations, is believed to be reliable. Users, however, should independently evaluate the suitability of each product for their particular application. Tyco Thermal Controls makes no warranties as to the accuracy or completeness of the information, and disclaims any liability regarding its use. Tyco Thermal Controls' only obligations are those in the Tyco Thermal Controls Standard Terms and Conditions of Sale for this product, and in no case will Tyco Thermal Controls or its distributors be liable for any incidental, indirect, or consequential damages arising from the sale, resale, use, or misuse of the product. Specifications are subject to change without notice. In addition, Tyco Thermal Controls reserves the right to make changes—without notification to Buyer—to processing or materials that do not affect compliance with any applicable specification.