

Configuration and Monitoring Assistant (CMA)

Product Overview


The DigiTrace NGC-CMA is an easy-to-use wireless handheld device for configuration and monitoring of DigiTrace NGC-20 control units. The handheld device has an intuitive user interface eliminating the need for extensive training. The hand held device is available in two versions. For non-hazardous areas, use type handheld device: NGC-CMA-NH. For hazardous area Zone 1 (Zone 21) and Zone 2 (Zone 22), use type: NGC-CMA-EX.


Hardware design

The DigiTrace NGC-CMA devices are designed for high productivity in an industrial environment. They are protected against humidity, dust, corrosion and extreme ambient temperatures. The high impact resistant TFT display with touch-screen functionality guarantees ease of use.

Software

The DigiTrace NGC-CMA software has been designed to provide full configuration and monitoring capabilities of the DigiTrace NGC-20 control units. The DigiTrace NGC-CMA allows wireless connectivity via Bluetooth® to any DigiTrace NGC-20 unit within range. The devices are based on HP iPAQ technology and are running a Windows Mobile® operating system.

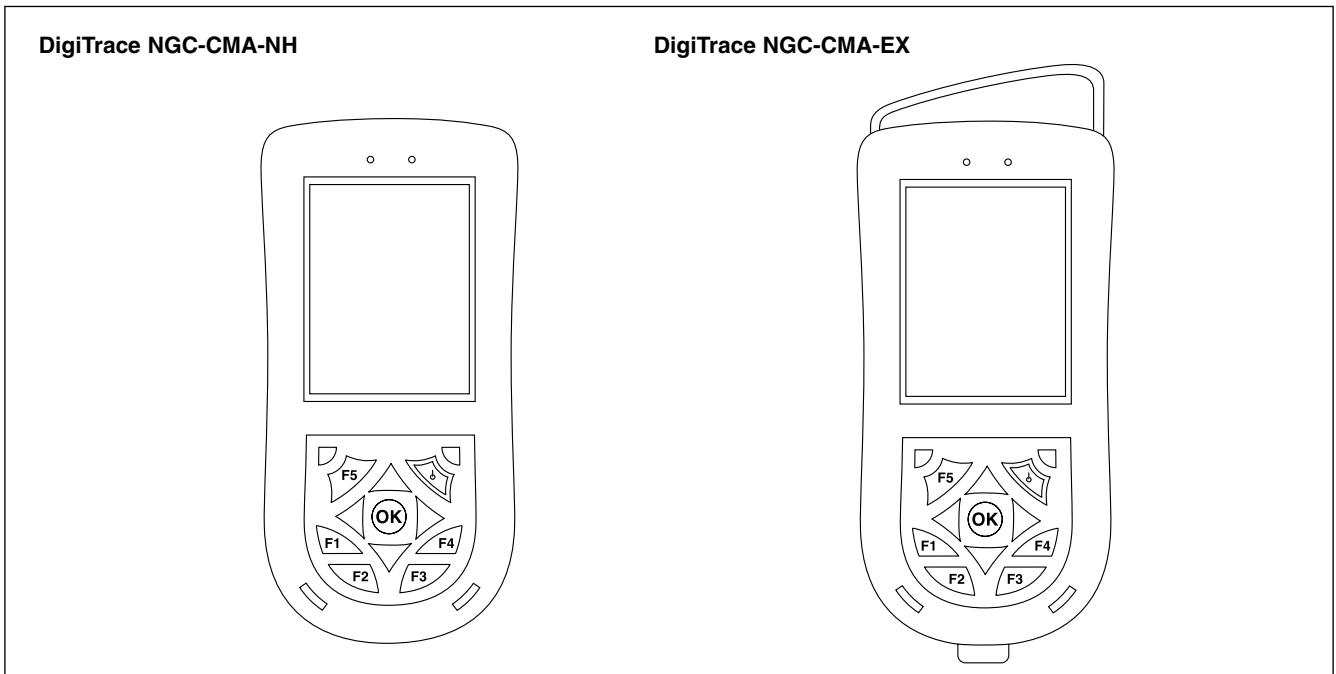

General	DigiTrace NGC-CMA-NH	DigiTrace NGC-CMA-EX
Typical use	DigiTrace NGC-CMA-EX and DigiTrace NGC-CMA-NH units are used for the configuration and monitoring of DigiTrace NGC-20 of heat-tracing control units.	
Approvals/Certification	General industrial use as well indoors as outdoors. Non hazardous areas only.	 II 2G EEx ia IIC T4 II 2D T99°C IP65 ZELM 04 ATEX 0200
Conditions of Safe Use	Refer to user instructions	Refer to Hazardous Area Certification
Environmental Protection	IP65, anti-static, non corrosive and shock proof housing (shock proof up to 1 m)	
Compatible control units	DigiTrace NGC-20-C-E, DigiTrace NGC-20-CL-E	

Product specification	DigiTrace NGC-CMA-NH	DigiTrace NGC-CMA-EX
Operating temperature	-10°C to +60°C	-10°C to +50°C
Charging temperature	0°C to +60°C	Devices may not be charged in hazardous areas.
Storage temperature	-10°C to +60°C	
Relative Humidity	Storage and operation up to 90% relative humidity	
Dimensions	178 x 85 x 39 mm	178 x 85 x 39 mm
Connectivity	Integrated WLAN 802.11b, Bluetooth™ Class II, IrDA. USB via charger cord and USB docking station	
Operating System	Windows® Mobile™ 5 Software for Pocket PC - Premium Edition	
Processor	520 MHz processor based on Intel® XScale™ technology	
Bluetooth interface	Integrated Bluetooth Class II chip (1 mW TX power). The range of the wireless connection may vary depending on the site conditions. Always try to be in direct line of sight when setting up a connection. Try to avoid obstacles. Range only guaranteed up to 2 meter distance	
Memory	Random Access Memory (RAM): 64 MB SDRAM Read Only Memory (ROM): 128 MB flash ROM of which is minimum 80 MB user accessible depending on the operating system language	
Display	3.5" Transreflective TFT color display with 64,000 colors protected by means of a Makrolon™ protection foil (foil is not user replaceable). Unit can be set up to work in either landscape or portrait mode	
Audio	Integrated microphone and speaker	
Power Supply	Rechargeable Lithium-Ion battery. Capacity variable depending on device type (NGC-PCMA-ORD = 2880 mAh and NGC-PCMA-EX = 4000 mAh) Note: Battery life depends upon user's operational habits, configuration, use of wireless functions and backlighting. Batteries are not replaceable by user	
Charger	Input voltage: 100 ~ 240 V a.c., 50/60 Hz. 0.3 A Output voltage: 5 V d.c., Max. 2A (typical values)	
Software (included)	System tools: Pocket Word, Pocket Excel, Pocket Outlook, Internet Explorer, Jet Keys (virtual keyboard), Bluetooth Manager, File Store, (non-volatile data storage in Flash-ROM), iTask Manager Image Zone, Self test, Audio, Power Status and DigiTrace CMA software	
Keyboard & buttons	ON/OFF Power switch, reset keys and 5 user programmable function keys, 5-way navigation field	
Kit Content	DigiTrace NGC-CMA-xx unit with full featured DigiTrace configuration and monitoring software pre-installed. Charger, Operating Instructions, Safety Instructions, Software CD (Microsoft license and windows mobile. This CD does not contain DigiTrace software)	
Ordering information & weight	NGC-CMA-NH (0.55 kg)	NGC-CMA-EX (0.7 kg)
PN	1244-006606	1244-006605
List of accessories and spare parts	NGC-CMA-LCC (Leather carrying holster case)	1244-006580 (0.13 kg)
	NGC-CMA-USB (USB data transmission set. This is not required in case the units are used with the NGC-CMA-BAY or the units are set up for wireless communication either via Bluetooth or Wireless LAN)	1244-006581 (0.19 kg)
	NGC-CMA-BAY (Docking station)	1244-006607 (0.35 kg)
	NGC-CMA-NH-UNIT (Unit with DigiTrace CMA-software)	1244-006617
	NGC-CMA-EX-UNIT (Unit with DigiTrace CMA-software)	1244-006618

European Headquarters

Tyco Thermal Controls
Romeinsestraat 14
3001 Leuven
Belgium
Tel. (32) 16 213 511
Fax (32) 16 213 610
info@tycothermal.com

België / Belgique

Tyco Thermal Controls
Romeinsestraat 14
3001 Leuven
Tel. (016) 213 502
Fax (016) 213 604

Bulgaria

ERZET Engineering
Kompl. Bratja Miladinovi/bl57/vch.4A
BG-8000 Burgas
Tel./fax (56) 86 68 86
Mobile (88) 86 39 903
Fax (UK) +44 8701368787

Česká Republika

Raychem HTS s.r.o.
Novodvorská 82
14200 Praha 4
Tel. 241 009 215
Fax 241 009 219

Danmark

Tyco Thermal Controls Nordic AB
Flöjelbergsgatan 20B
SE-431 37 Mölndal
Tel. 70 11 04 00
Fax 70 11 04 01

Deutschland

Tyco Thermal Controls GmbH
Birlenbacher Strasse 19-21
57078 Siegen-Geisweid
Tel. 0800 1818205
Fax 0800 1818204

España

Tyco Thermal Controls N.V.
Ctra. De la Coruña, km. 23,500
Edificio ECU I
28290 Las Rozas, Madrid
Tel. (902) 125 307
Fax (91) 640 29 90

France

Tyco Thermal Controls SAS
B.P. 90738
95004 Cergy-Pontoise Cedex
Tél. 0800 906045
Fax 0800 906003

Hrvatska

ELGRI d.o.o.
S. Mihalica 2
10000 Zagreb
Tel. (1) 6050188
Fax (1) 6050187

Italia

Tyco Thermal Controls SPA
Centro Direzionale Milanofiori
Palazzo F1
20090 Assago, Milano
Tel. +39 02 57761520
Fax +39 02 57761528

Lietuva/Latvija/Eesti

Tyco Thermal Controls BV Atstovybe
Smolensko g. 6
LT-03201 Vilnius
Tel. +370 5 2136633
Fax +370 5 2330084

Magyarország

Szarka Ignác
Maroshévisz u. 8
1173 Budapest
Tel. (1) 253 76 17
Fax (1) 253 76 18

Nederland

Tyco Thermal Controls b.v.
Van Heuven Goedhartlaan 121
1181 KK Amstelveen
Tel. 0800 0224978
Fax 0800 0224993

Norge

Tyco Thermal Controls Norway AS
Postboks 146
1441 Drøbak
Tel. +47 66 81 79 90
Fax +47 66 80 83 92

Österreich

Tyco Thermal Controls
Division of Tyco Fire & Integrated
Solutions GmbH
Office Wien
Brown-Boveri Strasse 6/14
2351 Wiener Neudorf
Tel. (0 22 36) 86 00 77
Fax (0 22 36) 86 00 77-5

Polska

Tyco Thermal Controls Polska Sp. z o.o.
ul. Cybernetyki 19
02-677 Warszawa
Tel. 0 800 800 114
Fax 0 800 800 115

Republic of Kazakhstan

Tyco Thermal Controls
4 Khakimov St.
Atyrau, 060002
Tel. +7 7122 32 56 51
Fax +7 7122 32 56 38

Romania

Tyco Thermal Controls Romania
53 Primaverii Bvd.
011973 Bucuresti
Tel. 21 317 92 87
Fax 21 317 92 87

РОССИЯ и другие страны СНГ

ООО «Тайко Термал Контролс»
141407, Московская обл., г. Химки
ул. Панфилова, 19, 11 этаж,
Деловой Центр Кантри Парк
Тел. +7 (495) 540 18 85
Факс +7 (495) 540 18 86

Schweiz / Suisse

Tyco Thermal Controls N.V.
Office Baar
Haldenstrasse 5
Postfach 2724
6342 Baar
Tel. (041) 766 30 80
Fax (041) 766 30 81

Serbia and Montenegro

Keying d.o.o.
Vuka Karadžića 79
23300 Kikinda
Tel. (230) 401 770
Fax (230) 401 790

Suomi

Tyco Thermal Controls Nordic AB
Flöjelbergsgatan 20B
SE-431 37 Mölndal
Puh. 0800 11 67 99
Telekopio 0800 11 86 74

Sverige

Tyco Thermal Controls Nordic AB
Kanalvägen 3 A
SE-194 61 Upplands Väsby
Tel. 08-590 094 60
Fax 08-590 925 70

Türkiye

SAMM Dış Ticaret A.Ş.
Yeniyol Sk. Etap İş Merkezi C
Blok No: 10 Kat: 6
34722 Acıbadem - Kadıköy
İSTANBUL
Tel: +90-216-325 61 62 (Pbx)
Faks: +90-216-325 22 24

United Kingdom

Tyco Thermal Controls (UK) Ltd
3 Rutherford Road,
Stephenson Industrial Estate
Washington, Tyne & Wear
NE37 3HX
Tel. 0800 969013
Fax: 0800 968624

www.tycothermal.com

DigiTrace is a trademark of Tyco Thermal Controls, LLC or its affiliates.

Sharepoint and Windows® Mobile™ are trademarks of Microsoft Cooperation. HP iPAQ is a trademark of Hewlett-Packard.

Important: All information, including illustrations, is believed to be reliable. Users, however, should independently evaluate the suitability of each product for their particular application. Tyco Thermal Controls makes no warranties as to the accuracy or completeness of the information, and disclaims any liability regarding its use. Tyco Thermal Controls' only obligations are those in the Tyco Thermal Controls Standard Terms and Conditions of Sale for this product, and in no case will Tyco Thermal Controls or its distributors be liable for any incidental, indirect or consequential damages arising from the sale, resale, use or misuse of the product. Specifications are subject to change without notice. In addition, Tyco Thermal Controls reserves the right to make changes, without notification to the Buyer, to processing or materials that do not affect compliance with any applicable specification.

tyco

Thermal Controls

 Our products satisfy the requirements of the relevant European Directives.