

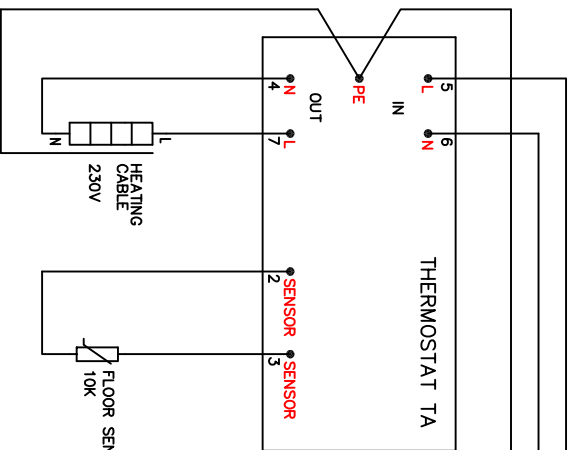


SENSING THE ROOM / COTTAGE TEMPERATURE




EXTERNAL FLOOR HEATING THERMOSTAT IN ROOM TYPE TA

GSM CONTROLLER

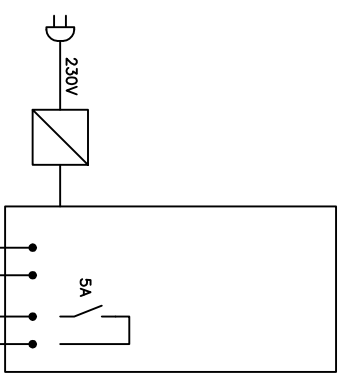

GSM/SMS
ON/OFF OF THERMOSTAT/HEATING CABLE INDICATION OF ROOM TEMPERATURE
POSSIBLE TO ACTIVATE ALARM FUNCTION:
ALARM IF TOO LOW ROOM TEMPERATURE AND AUTOMATICALLY SWITCH ON THE RELAY OUTPUT
SWITCH OFF THE RELAY WHEN THE SENSOR TEMPERATURE IS ABOVE ALARM LIMIT AGAIN (FOR EX. 10 DEG.C)

CONTACTOR FOR CONTROL OF POWER SUPPLY TO THERMOSTAT AND HEATING CABLE



L 230V
N
PE

Tyco Thermal Controls

APPROVED BY	DESIGN BY	THERMOSTAT TA WITH GSM CONTROLLER
	MW	REMOTE ON/OFF OF FLOOR HEATING
DRAWN BY	CIRCUITS DIAGRAM	
MW		
DATE		
060712		

REV	SHEET
	1
REV	SHEET
	1
REV	SHEET
	1

E3-TA-GSM2