



SENSING THE ROOM / COTTAGE TEMPERATURE




GSM CONTROLLER (SOFTWARE ADAPTED FOR TTC)

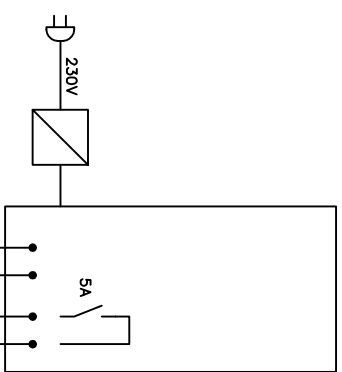


GSM/SMS
ON/OFF OF HEATING CABLES
INDICATION OF ROOM TEMPERATURE

POSSIBLE TO ACTIVATE ALARM FUNCTION:
ALARM IF TOO LOW ROOM TEMPERATURE
AND AUTOMATICALLY SWITCH ON
THE RELAY OUTPUT
SWITCH OFF THE RELAY WHEN THE
SENSOR TEMPERATURE IS ABOVE
ALARM LIMIT AGAIN (FOR EX. 10 DEG.C)

L1
N
230V



CONTACTOR FOR CONTROL OF
HEATING CABLES IN FLOOR

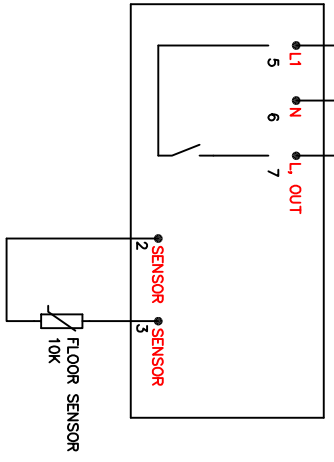

EXTERNAL FLOOR HEATING THERMOSTAT IN ROOM
TYPE TA/TC



POWER SUPPLY
TO HEATING CABLES

Tyco Thermal Controls

APPROVED BY	DESIGN BY	THERMOSTAT TA/TC WITH GSM MODULE
	MW	REMOTE ON/OFF OF FLOOR HEATING
DRAWN BY	CIRCUITS DIAGRAM	
MW		
DATE		
060627		

E3-TA-GSM

REV	SHEET
1	1
---	---